




Available versions



Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3500.2200/830	2200	15	3000	Ra > 80	50.000	5	3	601	1,50
3500.2200/840	2200	15	4000	Ra > 80	50.000	5	3	601	1,50
3500.3300/830	3300	23	3000	Ra > 80	50.000	5	3	882	2,00
3500.3300/840	3300	23	4000	Ra > 80	50.000	5	3	882	2,00
3500.4400/830	4400	29	3000	Ra > 80	50.000	5	3	1163	2,50
3500.4400/840	4400	29	4000	Ra > 80	50.000	5	3	1163	2,50
3500.5500/830	5500	36	3000	Ra > 80	50.000	5	3	1444	3,50
3500.5500/840	5500	36	4000	Ra > 80	50.000	5	3	1444	3,50
3500.8000/830	8000	54	3000	Ra > 80	50.000	5	3	1163	2,50
3500.8000/840	8000	54	4000	Ra > 80	50.000	5	3	1163	2,50
3500.10000/830	10000	67	3000	Ra > 80	50.000	5	3	1444	3,50
3500.10000/840	10000	67	4000	Ra > 80	50.000	5	3	1444	3,50

Recessed LED luminaire

Mounting:	Ceiling recessed, mounting brackets included
Body material:	Aluminium profile
Colour:	Standard Gray 9006, other RAL colours on request (please add RAL code after index number)
LED module:	Philips / Osram or Tridonic LED module included
Colour temperature:	3000K or 4000K
Colour Rendering Index (CRI)	>80 in standard, other on request
Driver:	Electronic driver in standard, DALI on request
Emergency unit:	on request - Standard or DALI 3 hour emergency unit
Movement sensor:	on request
Daylight control sensor:	on request
Operating temperature range:	0°C ... +40°C
IP Class:	IP20 in standard, IP44 on request
Power:	220-240V 50/60Hz
Lighting direction:	Direct
Reflector type:	Aluminium white
Light distribution:	Symmetric
Diffuser:	White acrylic diffuser [WD] in standard, microprismatic [MPR] or any other on request, standard acrylic frosted [AC].
General data:	5 Years standard warranty UGR<19 diffuser on request

Luminaires can be connected into long lighting lines


Different lumen output or wattage available on request

All other technical features such as: Luminaire Efficiency, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficiency improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

- L - 590 x 64
- L - 870 x 64
- L - 1150 x 64
- L - 1430 x 64

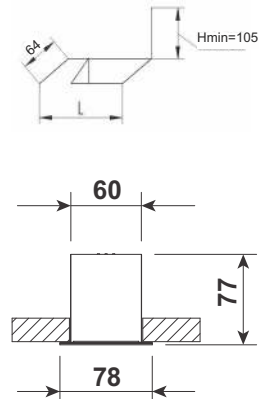

[WD] diffuser



[AC] diffuser



[MPR] diffuser

